


# A2 Networking Cabinets




Model No.	W*D	Capacity
A2.6642.700	600*600	42U

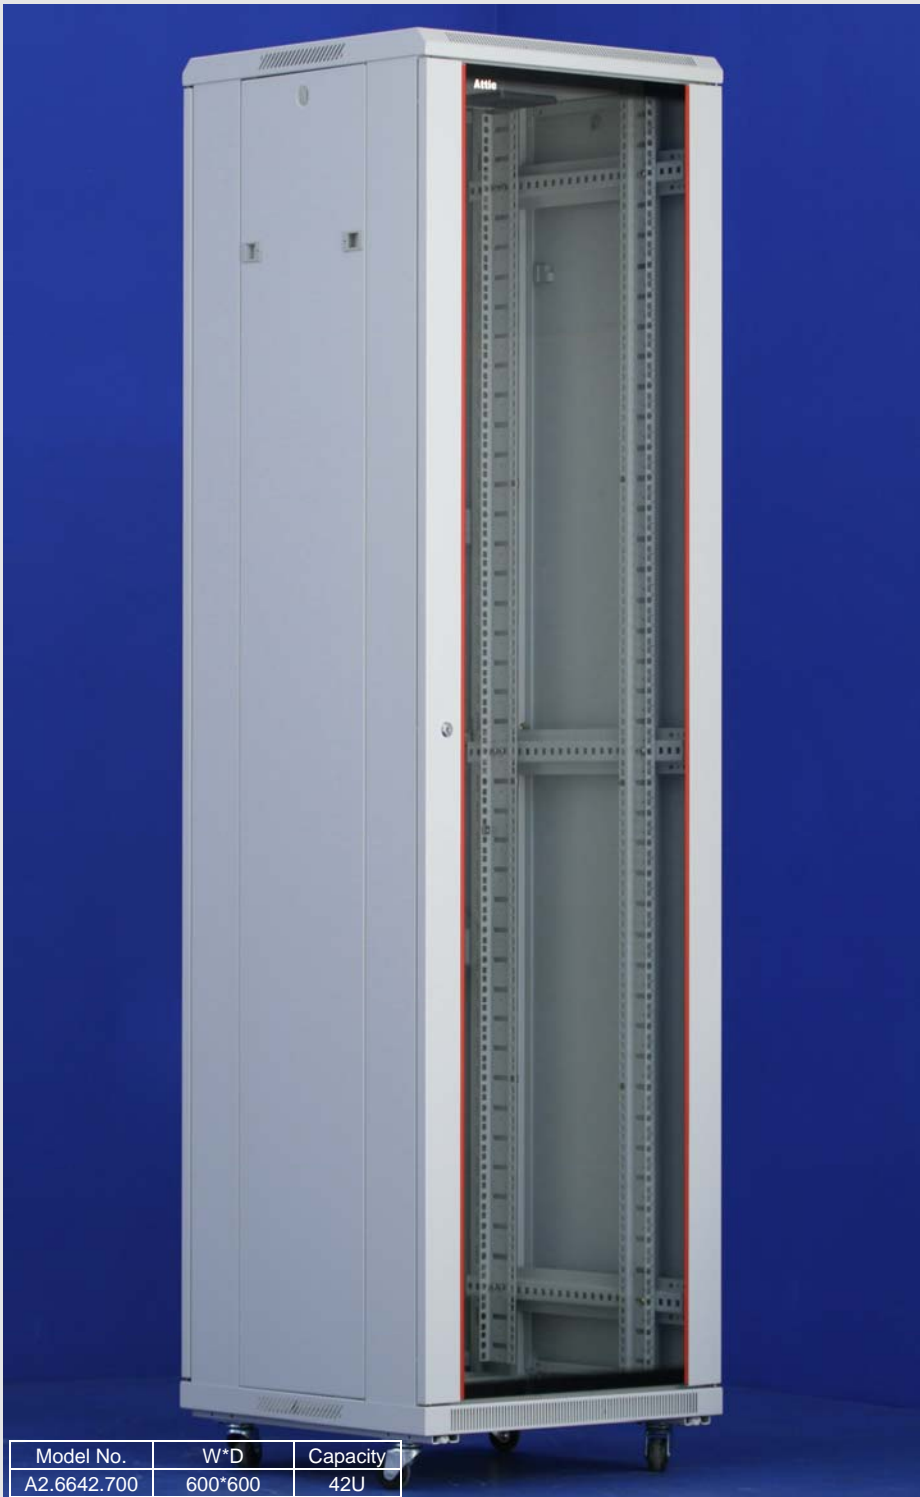

■ Fan Unit



Plate door border

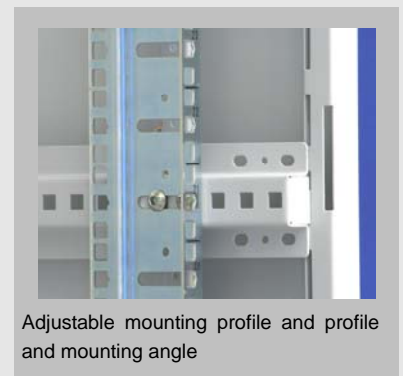

Adjustable mounting profile and profile and mounting angle



■ Lockable cable entry

## Standard:

- Comply with ANSI/EIA RS-310-D、IEC297-2、DIN41494;PART1、DIN41494; PART7、ETSI standard;

## Feature:

- Exquisite design with precise dimension and craftsmanship;
- Toughened glass front door with silk-screened flower pattern, door border and steel rear door;
- Adjustable feet and heavy duty castors are available at the same time;
- Several lockable cable entry on top cover and bottom panel with adjustable sizes;
- Optional plinth enables cabinet to stay in a fixed position, meeting requirements of under-base cable entry/ventilation and prevention;
- Efficient cabinet buying kit(patent);
- Removable side panels, easy to install and maintain;
- Around 1/2~2/3 of original assembled volume when flat pack.

## Material:

- SPCC cold rolled steel;  
Thickness: mounting profile 2.0mm, mounting angle 1.5mm, others 1.2mm

## Surface Finish:

- Degreasing、pickling、phosphoric、powder coated

## Degree of Protection:

- IP20

## Loading Capacity:

- Static loading: 500KG